



NEO GHN

BOMBAS DE ALTA EFICIENCIA ENERGETICA PARA CALEFACCIÓN (Según normativa EUP/ERP) HIGH ENERGY-EFFICIENT CIRCULATOR PUMP (According to EUP/ERP regulation)

Aplicaciones

Bomba electrónica de bajo consumo, indicada para circulación de agua en sistemas domésticos de calefacción.

Materiales

Cuerpo de bomba hierro fundido
Eje del impulsor plástico
Eje cerámico
Placa de soporte: acero inoxidable
Soporte cerámico

Motor

Compatibilidad electromagnética

EL641/2009-EE 1 < 0.23

Botón on/off

Bajo consumo energético

Ajuste automatico a las

condiciones ambientales

Protección tipo IPX4

Tipo de aislamiento F

Nivel de sonoridad < 45 db

Limitaciones

Temperatura liquido 4°C a 95°C

Temp. ambiente 0 a 40°C

Presión max. De trabajo 10 bar

Rango de flujo 11m3/h

Applications

This low consumption electronic pump is indicated for the circulation of water in Domestic heating systems.

Materials

Cast iron pump body
Plastic impeller shaft
Ceramic shaft
Supportplate: stainless Steel
Ceramic Support

Motor

Electromagnetic compatibility

EL641/2009-EE < 0.23

On/off Button

Low power consumption

Automatic adjustment to

ambient conditions

Protection type IPX4

Insulation type F

Loudness < 45 db

Limitations

Liquid temperature 4°C a 95°C

Ambient temperature 0 a 40°C

Max. Working pressure 10 bar

Flow range 11m3/h






Racores y aislamiento incluidos

Fittings and insulation included

MODELO	Tensión (V)	Potencia (w)	Q max (l/h)	mca (h)	Peso Kg	Conexiones		Codigo EAN	UNIDAD EMBALAJE	UNIDADES PALET
						ROSCA	RACOR			
NEOGHN 25/12 -180	220	5 ≥ 220	9.500	12	5	1 1/2"	1"	8436028587193	4	64
NEOGHN 25/15 -180		5 ≥ 280	12.000	15		1 1/2"	1"	8436028587209	4	64
NEOGHN 25/18 -180		5 ≥ 360	11.000	18		2"	1 1/4"	8436028587216	4	64
NEOGHN 32/12 -180		5 ≥ 220	9.500	12		1 1/2"	1"	8436028587223	4	64
NEOGHN 32/15 -180		5 ≥ 280	10.200	15		1 1/2"	1"	8436028587230	4	64
NEOGHN 32/18 -180		5 ≥ 360	11.000	18		2"	1 1/4"	8436028587247	4	64

Altura (m.)

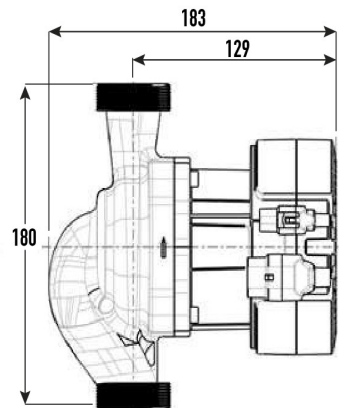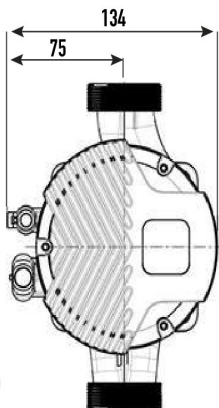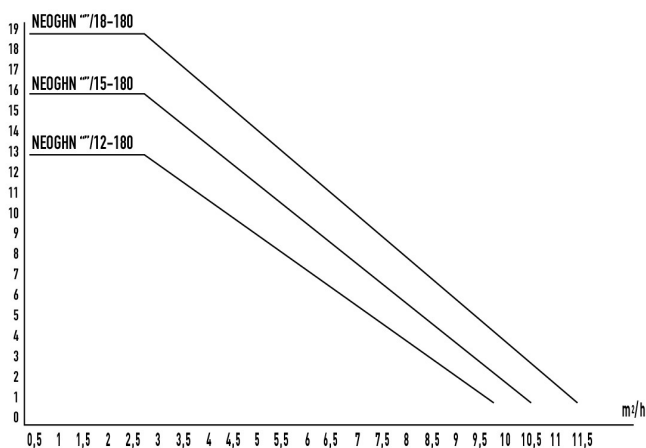

CALEFACCIÓN Y ACS